




STARLINK | STANDARD SPECIFICATIONS

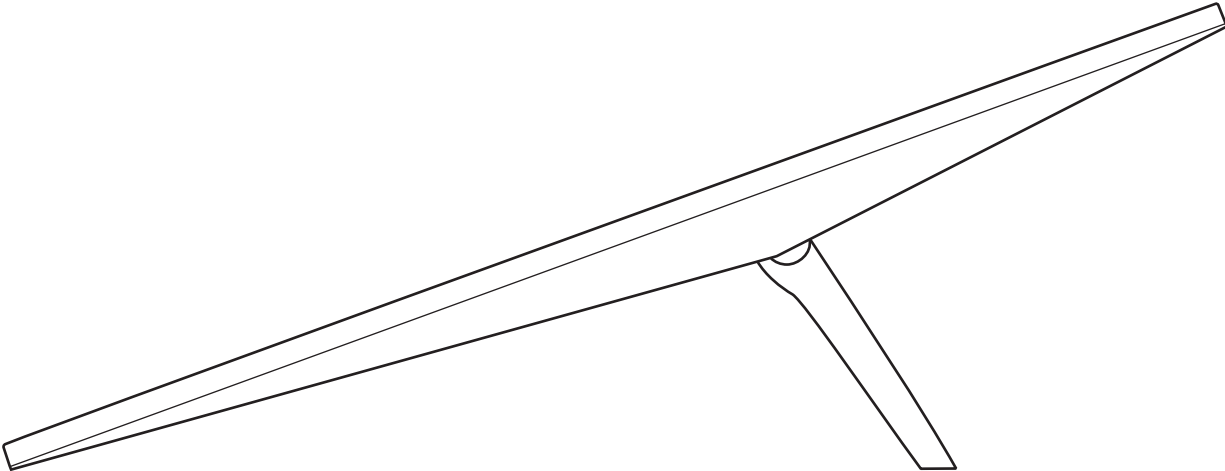


### What's In The Box




Standard



Kickstand




Gen 3 Router




Starlink Cable

15 m  
(49.2 ft)



AC Power Cable

1.5 m  
(4.92 ft)




Power Supply



1.5 m  
(4.92 ft)



**Package Weight:** 6.73 kg (14.83 lbs)


**Package Dimensions:** 652.4 x 451.7 x 97.9 mm (25.69 x 17.78 x 3.84 in)

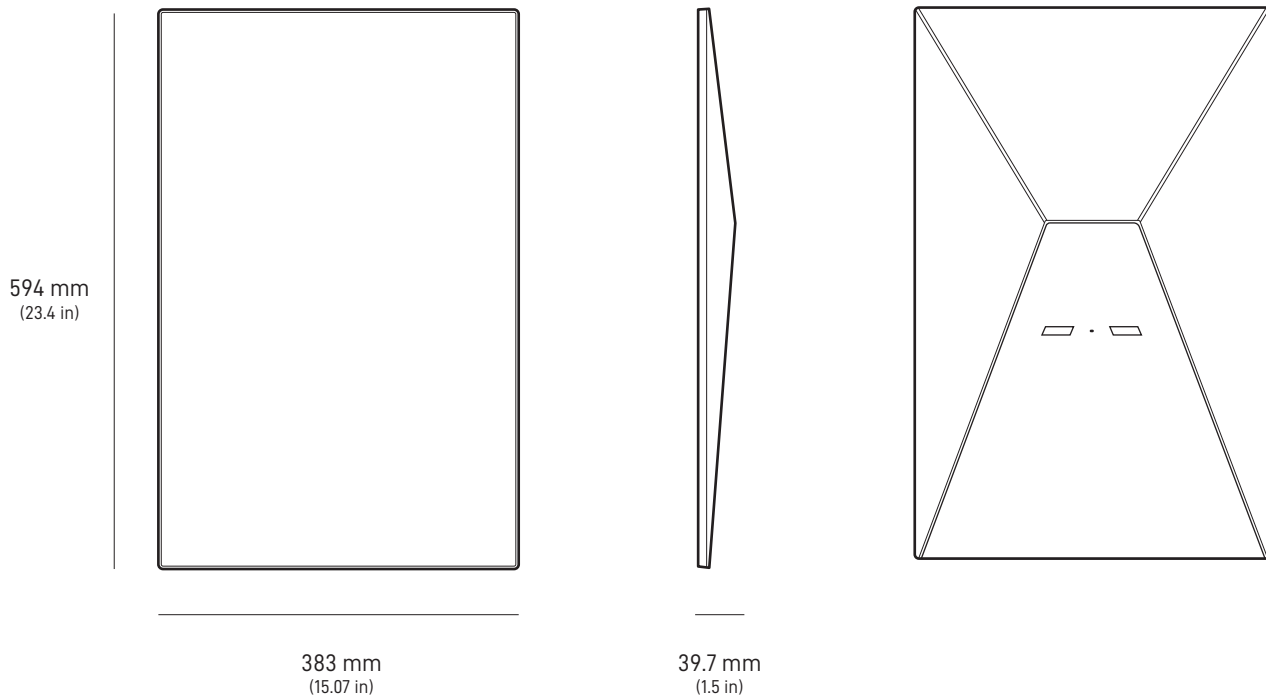


<b>Antenna</b>	Electronic Phased Array
<b>Field of View</b>	110°
<b>Orientation</b>	Software Assisted Manual Orienting
<b>Weight</b>	2.9 kg (6.4 lb) 3.2 kg (7 lb) with Kickstand 3.8 kg (8.3 lb) with Kickstand & 15 m Cable
<b>Environmental Rating</b>	IP67 Type 4
<b>Operating Temperature</b>	-30°C to 50°C (-22°F to 122°F)
<b>Wind Speed</b>	Operational: 96 kph+ (60 mph+)
<b>Snow Melt Capability</b>	Up to 40 mm / hour (1.5 in / hour)
<b>Power Consumption</b>	Average: 75 - 100 W

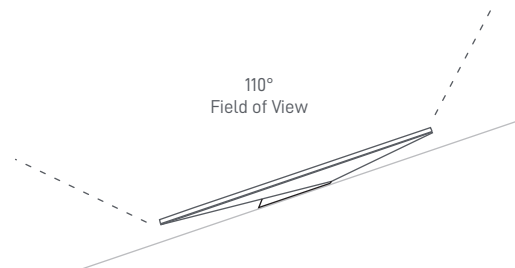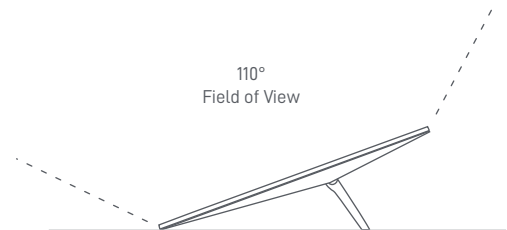

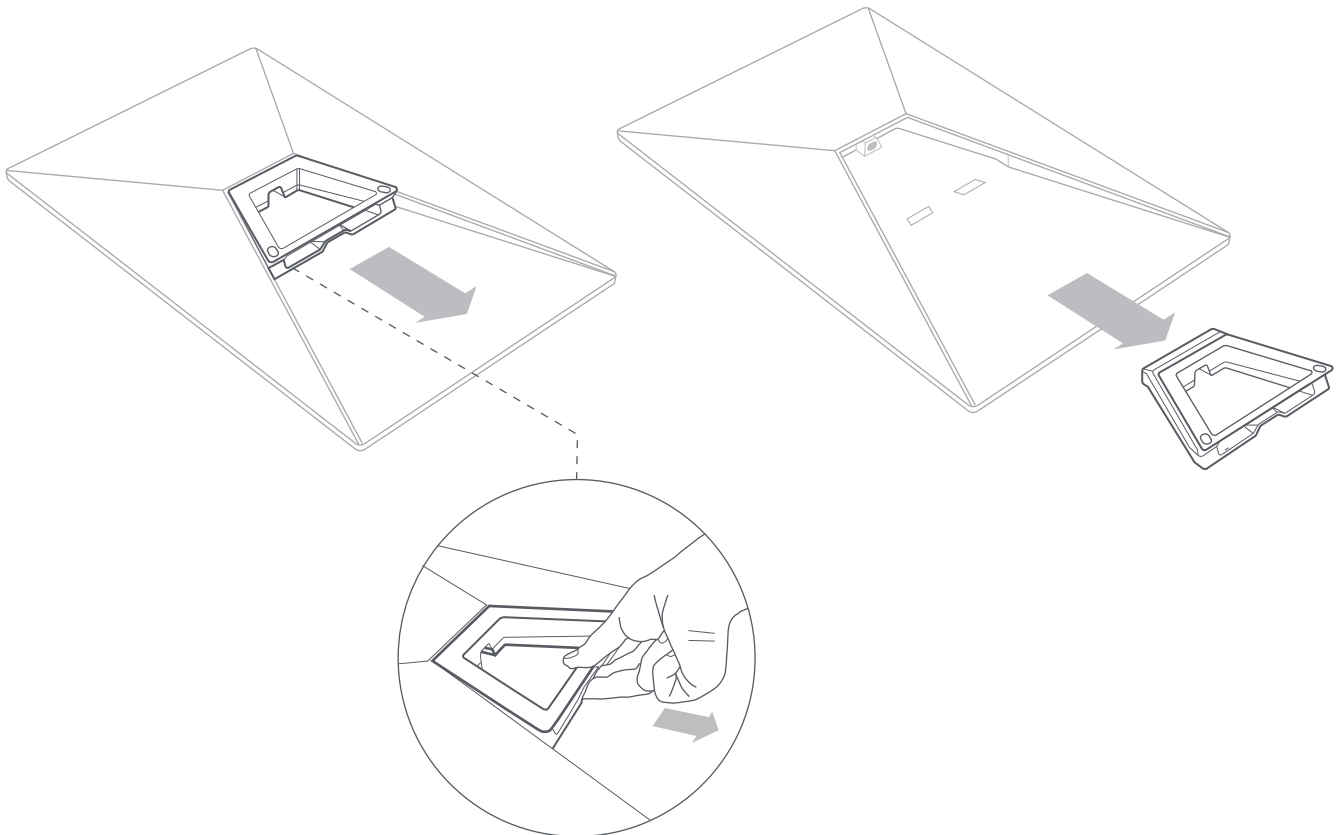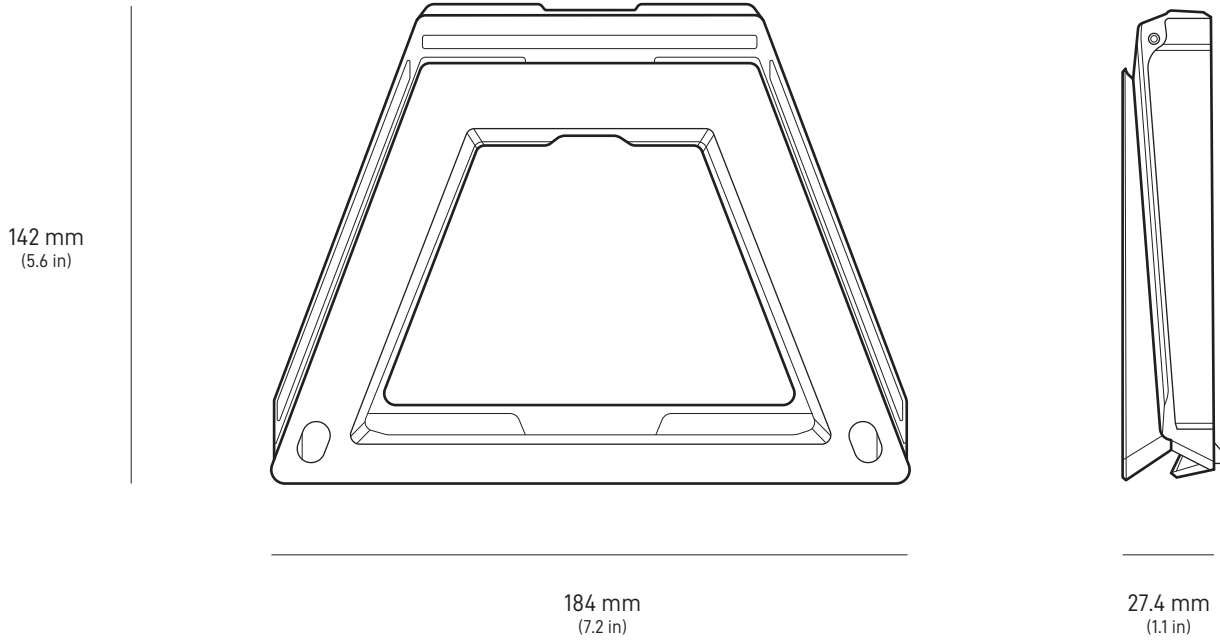



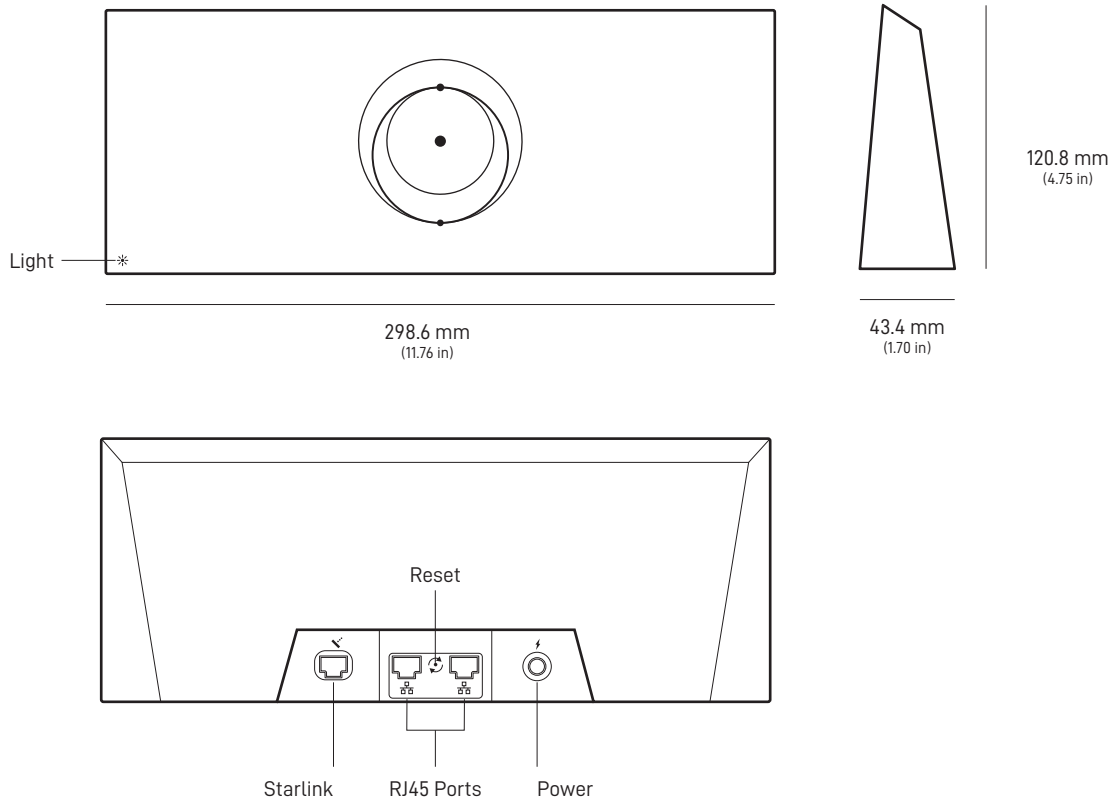


<b>Product Dimensions</b>	43.4 x 298.6 x 120.4 mm (1.7 in x 11.76 in x 4.74 in)
<b>Wi-Fi Technology</b>	802.11 a/b/g/n/ac/ax
<b>Generation</b>	WiFi 6
<b>Radio</b>	Tri Band 4 x 4 MU-MIMO
<b>Ethernet Ports</b>	Two (2) Latching Ethernet LAN ports with removable cover
<b>Coverage</b>	Up to 297 m <sup>2</sup> (3,200 ft <sup>2</sup> )
<b>Operating Temperature</b>	-30°C to 50°C (-22°F to 122°F)
<b>Weight</b>	0.57 kg (1.25 lbs)
<b>Security</b>	WPA2
<b>Environmental Rating</b>	IP56 Rated (Water Resistant), configured for indoor use
<b>Power Indicator</b>	LED   face plate, lower left corner of router
<b>Mesh Compatibility</b>	Compatible with Starlink Gen 2 and Gen 3 Mesh Nodes, up to 3 Starlink Mesh Nodes
	*Not compatible with 3rd party mesh systems
<b>Devices</b>	Connect up to 235 devices

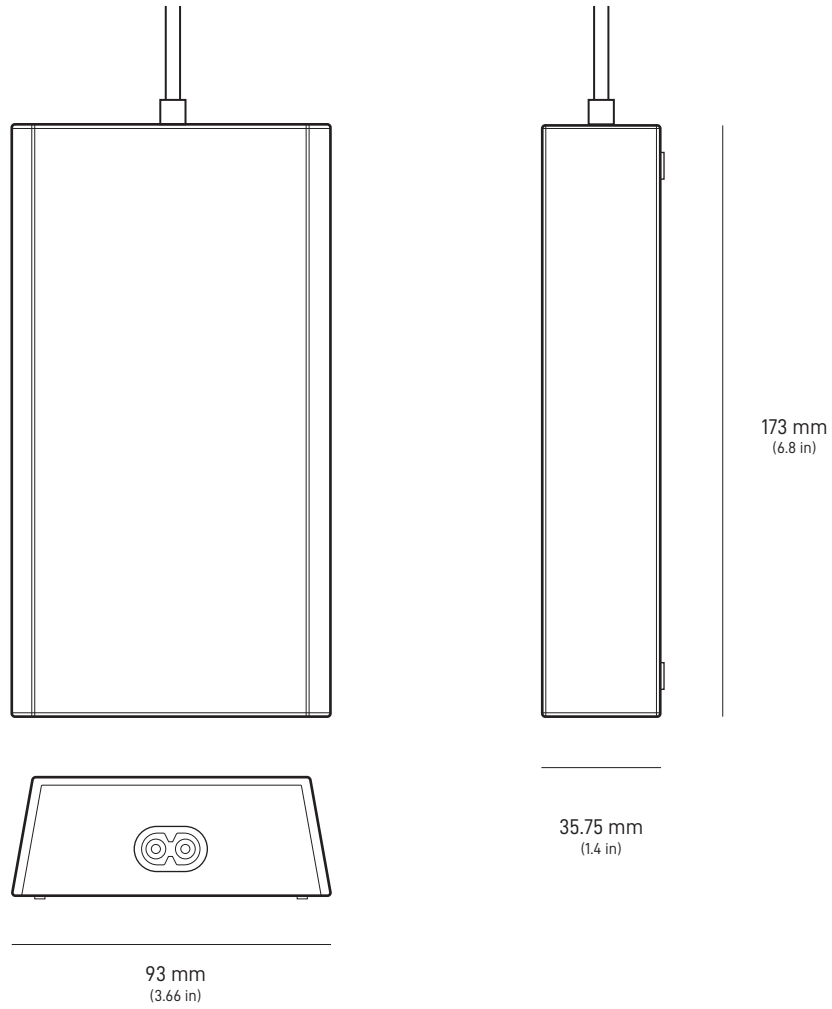




<b>Product Dimensions</b>	173 x 93 x 35.75 mm (6.8 in x 3.66 in x 1.4 in)
<b>Weight</b>	0.65 kg (1.43 lbs)
<b>Environmental Rating</b>	IP66 Type 4
<b>Operating Temperature</b>	-30°C to 60°C (-22 to 140°F)
<b>Power Specifications</b>	100-240V ~ 2.5A 50 - 60 Hz

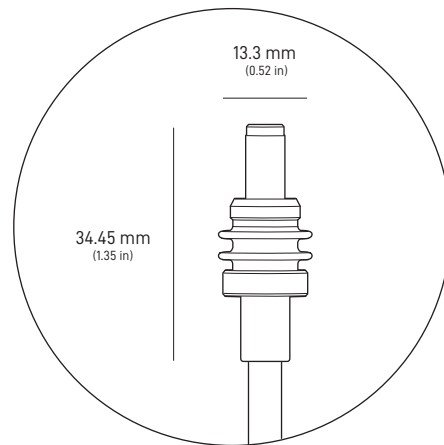

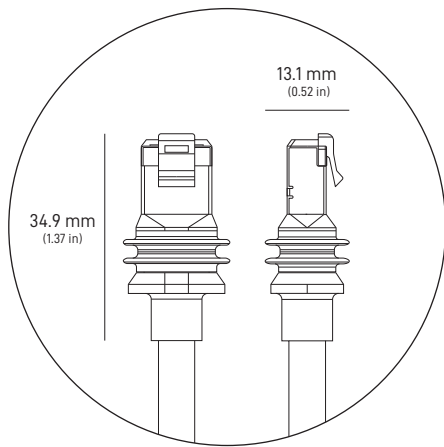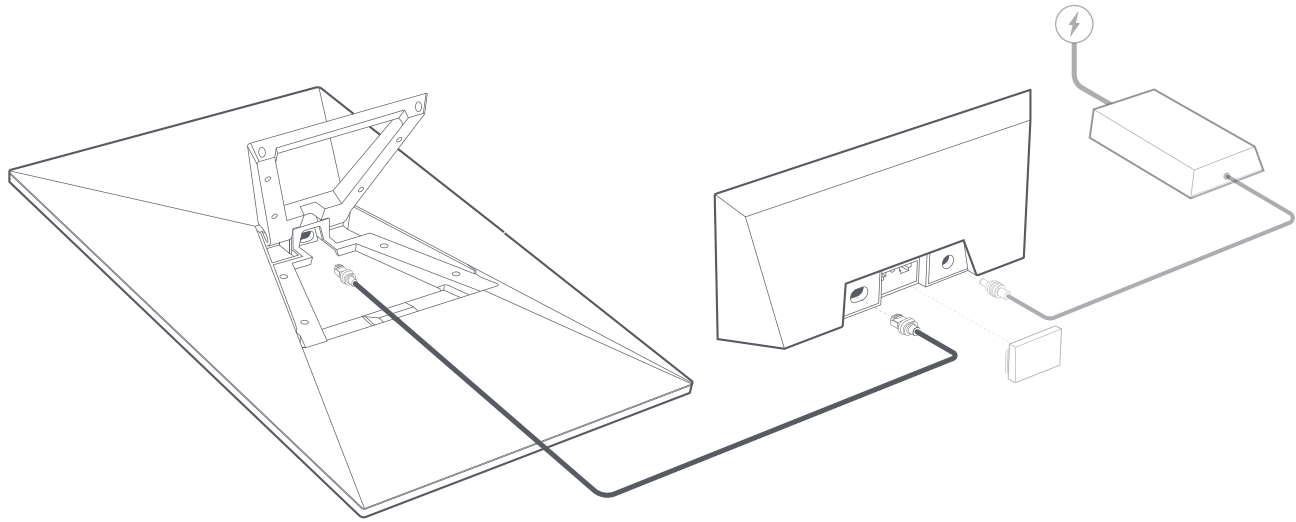


Pin 1	Wire Color	Pin 2
Shield	Drain - Bare Wire	Shield
8	Brown	8
7	White / Brown	7
6	Green	6
5	White / Blue	5
4	Blue	4
3	White / Green	3
2	Orange	2
1	White / Orange	1

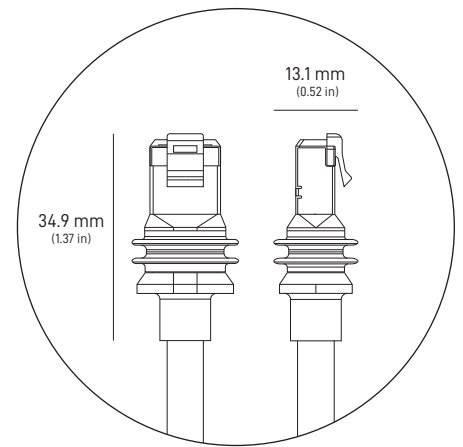

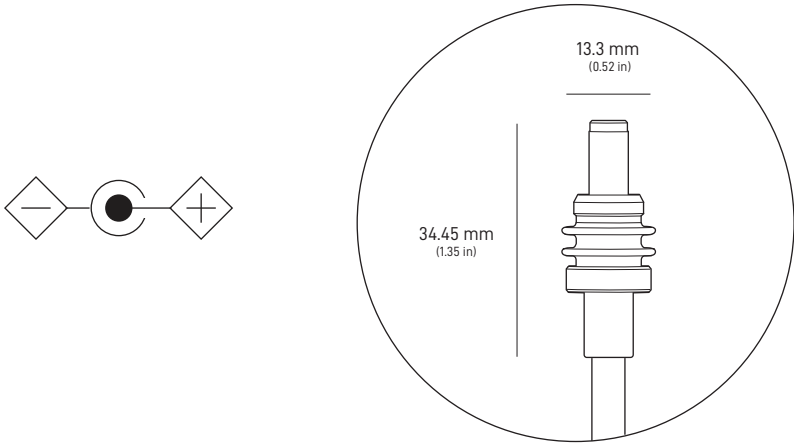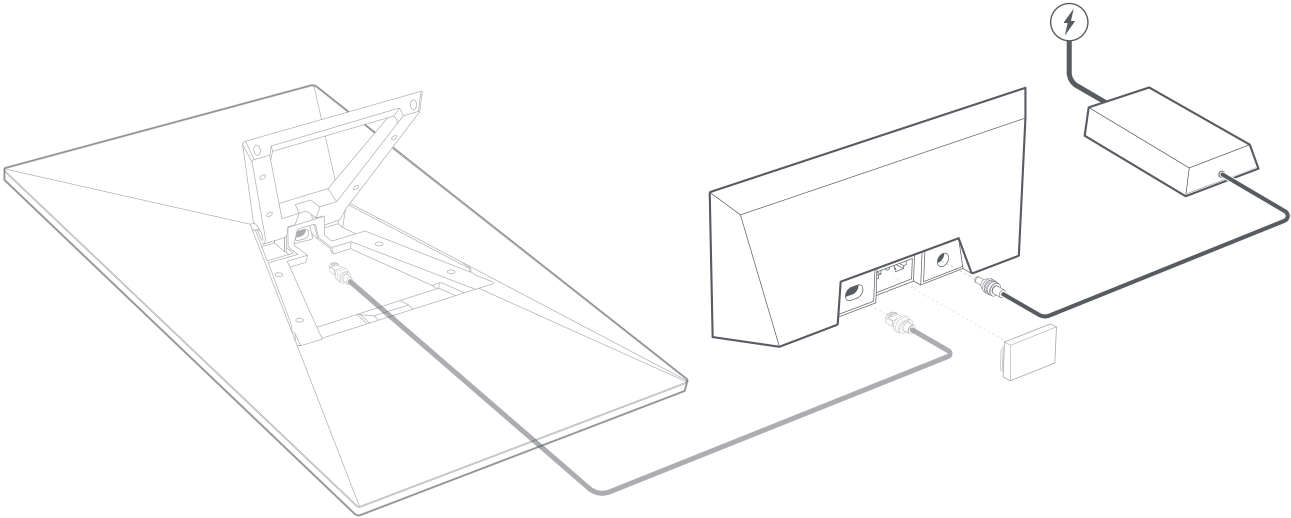





STARLINK | MINI SPECIFICATIONS

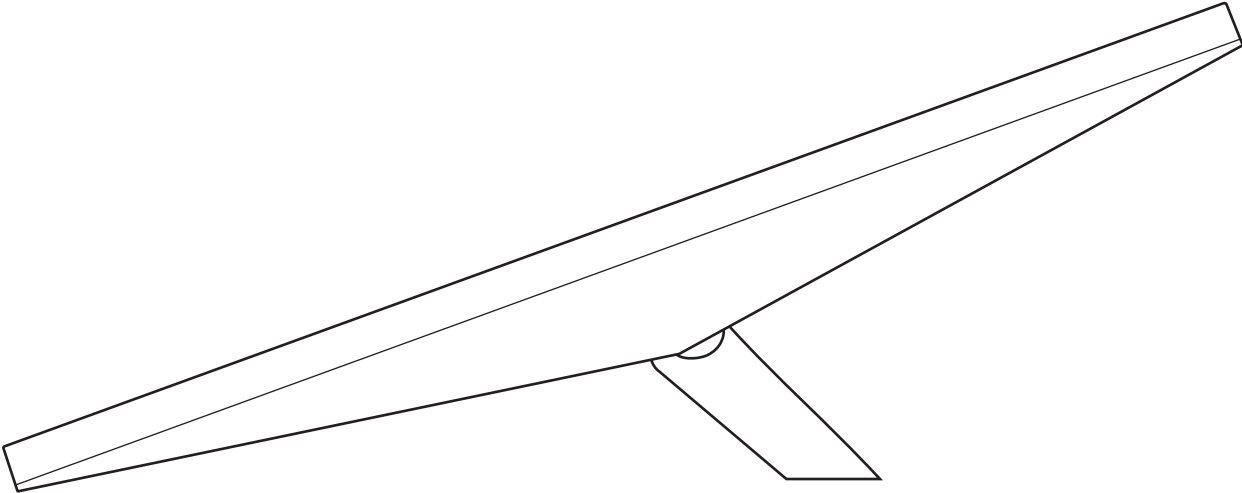


### What's In The Box

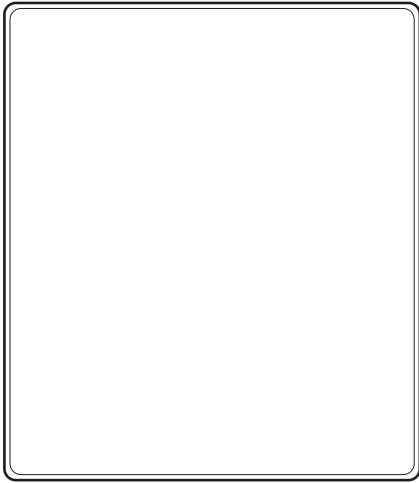


Dish

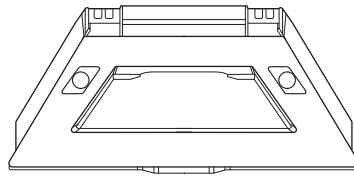

Kickstand

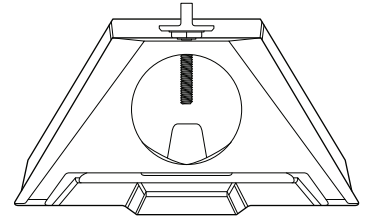


Pipe Adapter



Power Cable

15 m  
(4.92 ft)




Power Supply




Starlink Plug


**Package Weight:** 6.73 kg (14.83 lbs)

**Package Dimensions:** 430 x 334 x 79 mm (16.92 x 13.14 x 3.11 in)

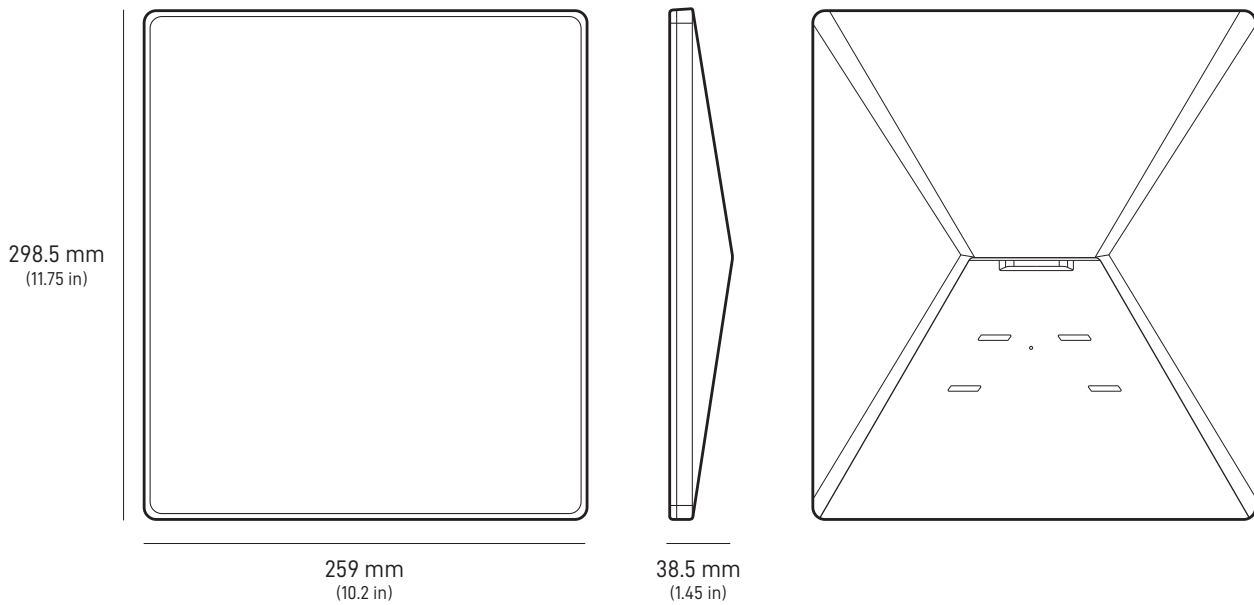


<b>Antenna</b>	Electronic Phased Array
<b>Field of View</b>	110°
<b>Orientation</b>	Software Assisted Manual Orienting
<b>Weight</b>	1.10 kg (2.43 lb) 1.16 kg (2.56 lb) with Kickstand 1.53 kg (3.37 lb) with Kickstand & 15 m Cable
<b>Environmental Rating</b>	IP67 Type 4
<b>Operating Temperature</b>	-30°C to 50°C (-22°F to 122°F)
<b>Wind Speed</b>	Operational: 96 kph+ (60 mph+)
<b>Snow Melt Capability</b>	Up to 40 mm / hour (1.5 in / hour)
<b>Power Consumption</b>	Average 25W, Snow Melt 60W


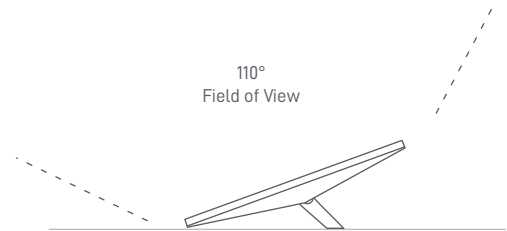







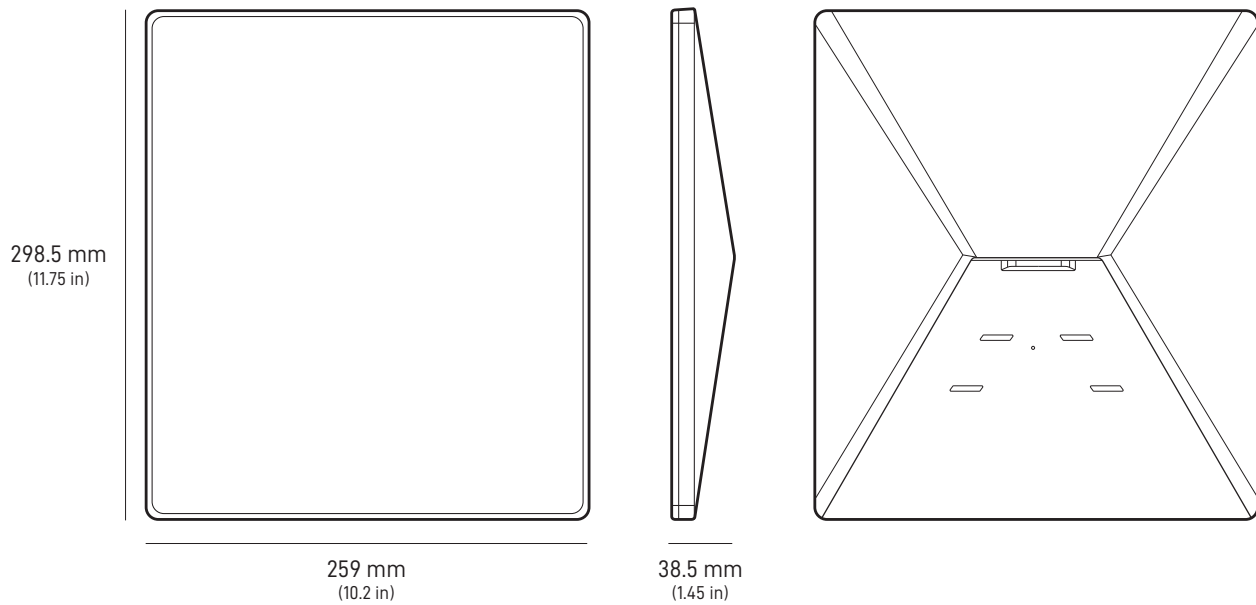




<b>Wi-Fi Technology</b>	802.11 a/b/g/n/ac/ax 802.11 a/b/g/n/ac/ax
<b>Generation</b>	WiFi 5
<b>Radio</b>	Dual Band 3 x 3 MU-MIMO
<b>Ethernet Ports</b>	One (1) Latching Ethernet LAN ports with removable cover
<b>Coverage</b>	Up to 112 m <sup>2</sup> (1,200 ft <sup>2</sup> )
<b>Security</b>	WPA2
<b>Power Indicator</b>	LED   rear face plate, lower left corner
<b>Mesh Compatibility</b>	Compatible with all Starlink mesh systems *Not compatible with 3rd party mesh systems
<b>Devices</b>	Connect up to 50 devices

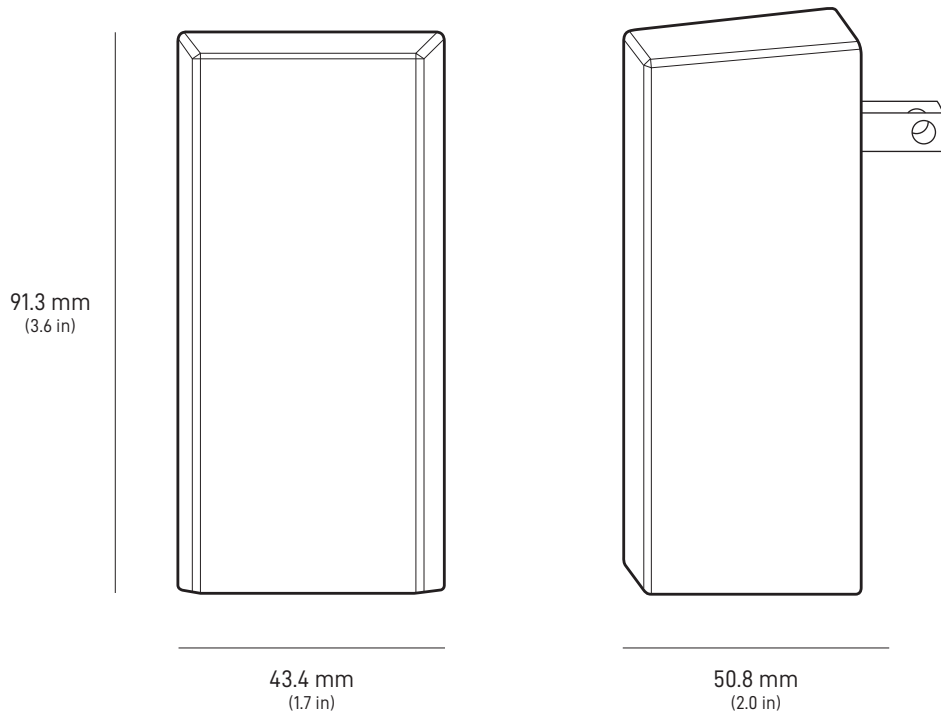

<b>Product Dimensions</b>	173 x 93 x 35.75 mm (6.8 in x 3.66 in x 1.4 in)
<b>Weight</b>	0.14 kg (0.32 lbs)
<b>Environmental Rating</b>	IP66 Type 4
<b>Operating Temperature</b>	-30°C to 50°C (-22 to 122°F)
<b>Power Specifications</b>	100-240V ~ 2.5A 50 - 60 Hz

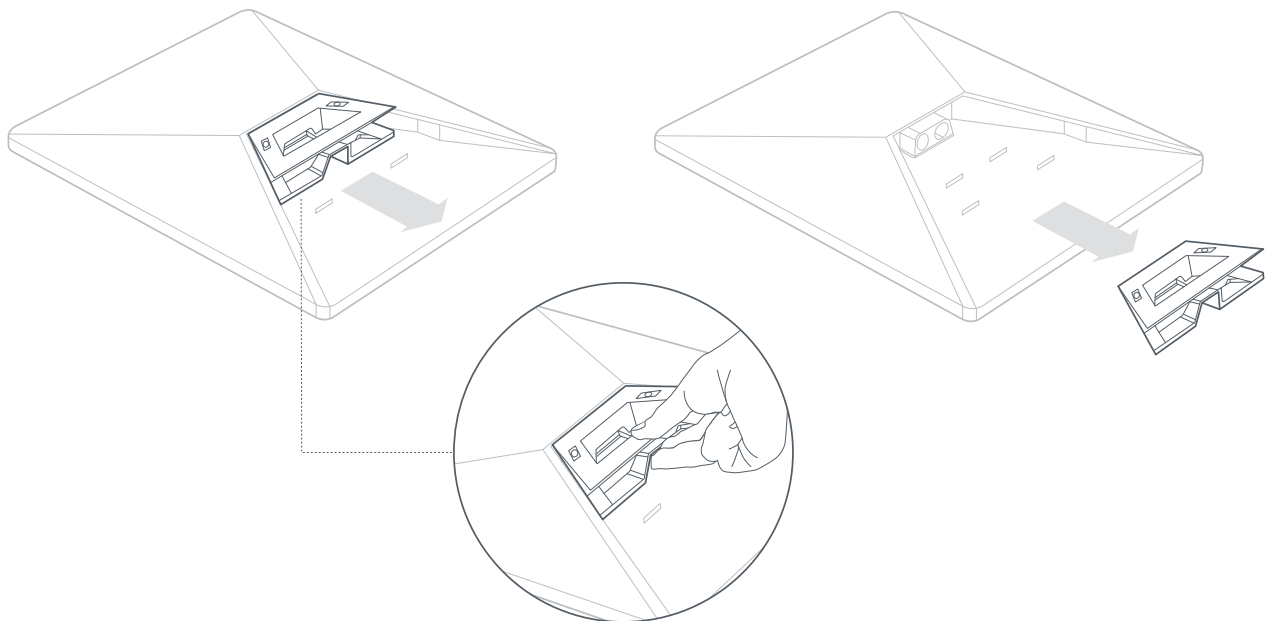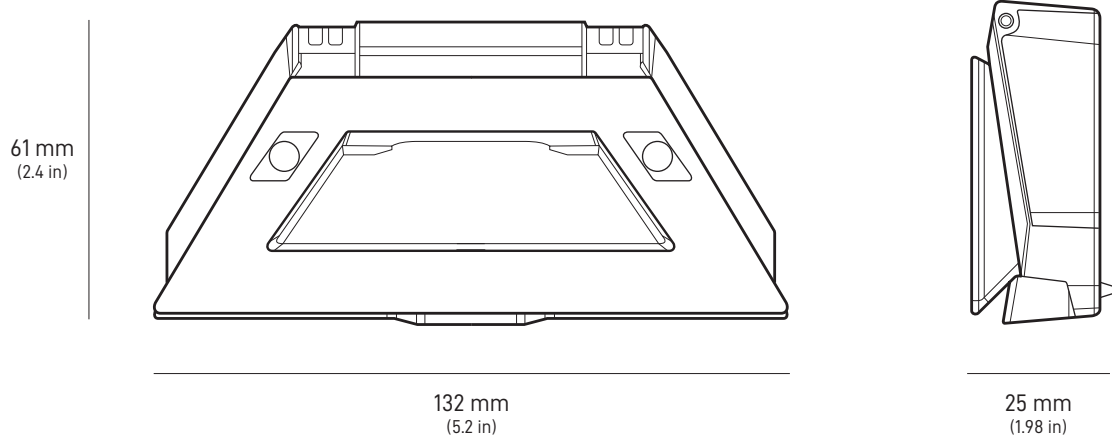


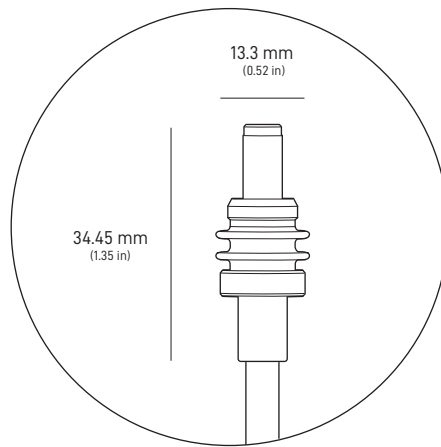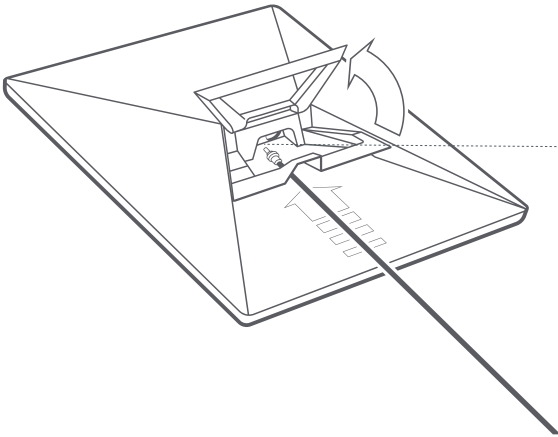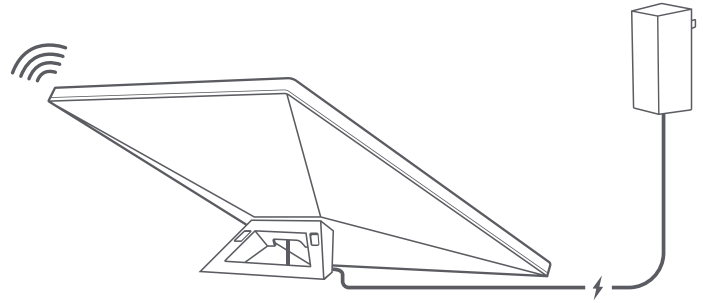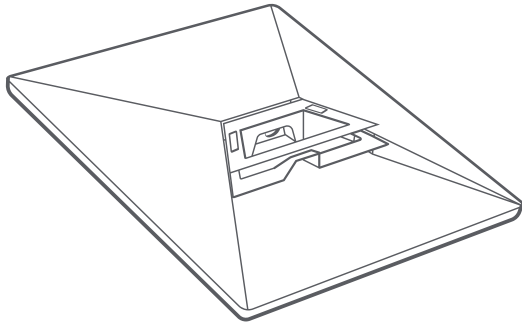

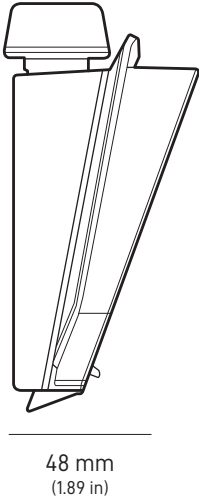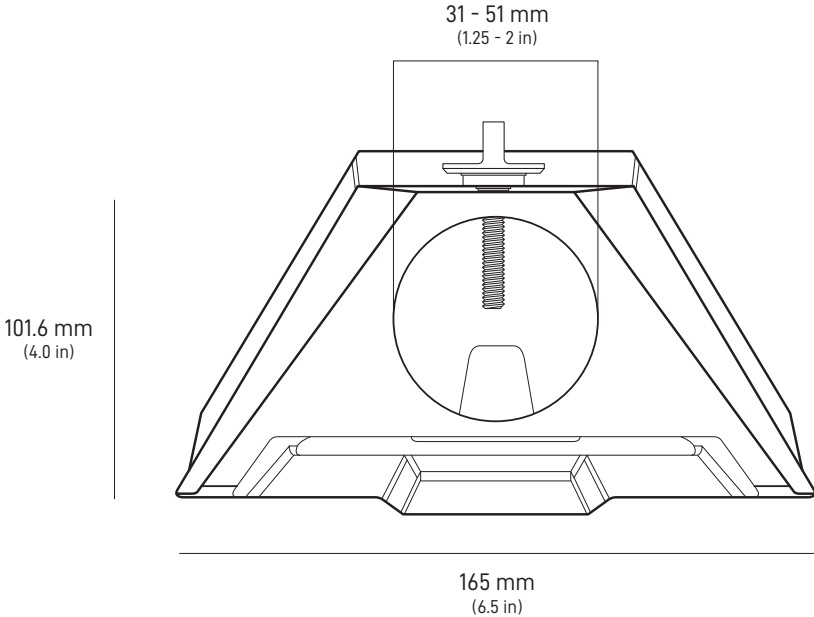





STARLINK | FLAT HIGH PERFORMANCE KIT SPECIFICATIONS

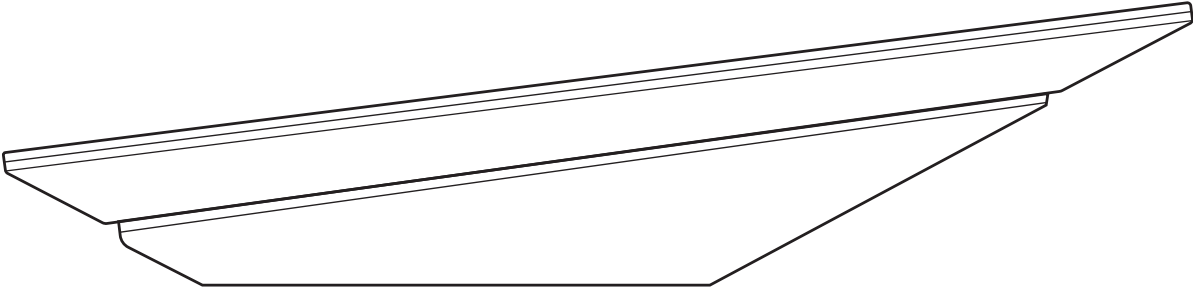


What's In The Box

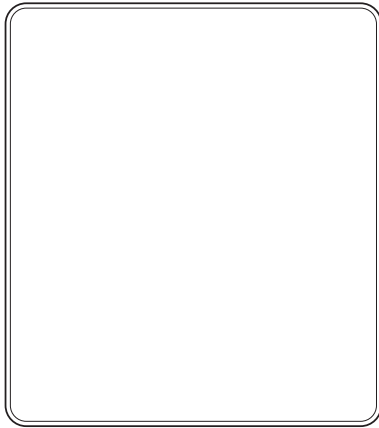


Dish

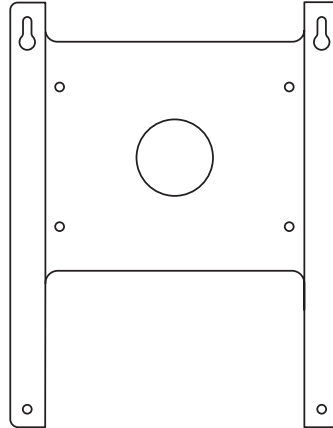


Wedge Mount



Power Supply




Power Supply Mount



Starlink Cable  
25 m  
(82 ft)




Ethernet Cable  
5 m  
(16.5 ft)




AC Cable (Power Supply)  
1.8 m  
(6 ft)



**Package Weight:** 16.25 kg (35.8 lbs)

**Package Dimensions:** 679 x 613 x 191 mm (26.7 x 24.1 x 7.5 in)

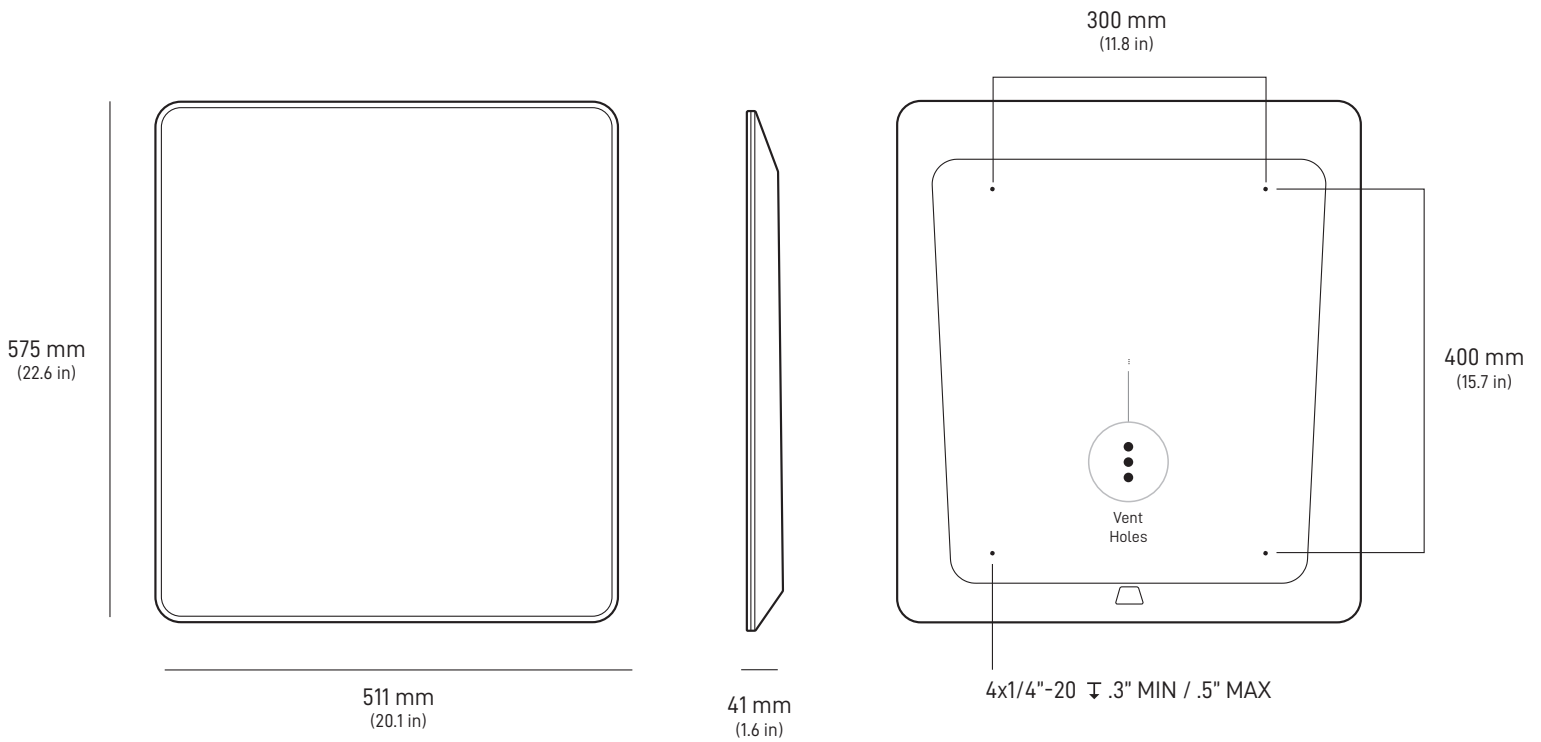


<b>Antenna</b>	Electronic Phased Array
<b>Field of View</b>	140°
<b>Orientation</b>	Fixed
<b>Dish Weight</b>	5.9 kg / 13 lbs without Cable 8.1 kg / 17.9 lbs with 25 m / 82 ft Cable
<b>Environmental Rating</b>	IP56
<b>Operating Temperature</b>	-30°C to 50°C (-22°F to 122°F)
<b>Wind Speed</b>	Survivable: 280 kph+ (174 mph+)
<b>Snow Melt Capability</b>	Up to 75 mm / hour (3 in / hour)
<b>Power Consumption</b>	Average: 110-150 W
<b>User LAN</b>	RJ45 Cable

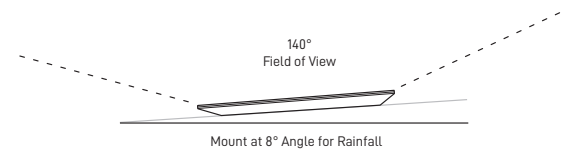



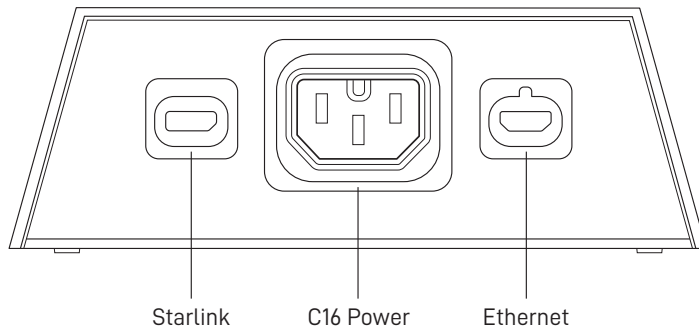
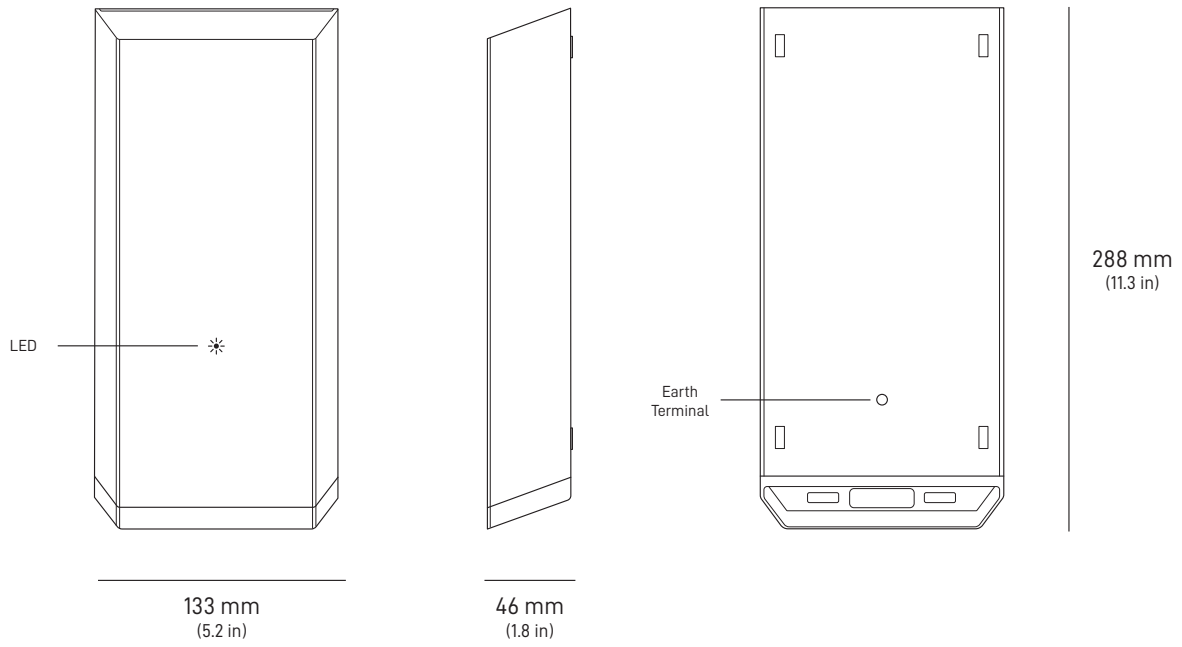


<b>Environmental Rating</b>	IP56
<b>Operating Temperature</b>	-30°C to 50°C (-22 to 122°F)
<b>Weight</b>	1.5kg (3lbs)
<b>Grounding</b>	Dedicated Earth Terminal
<b>Power Specifications</b>	100-240V - 6.3A 50 - 60 Hz
<b>Mounting</b>	Included Mount

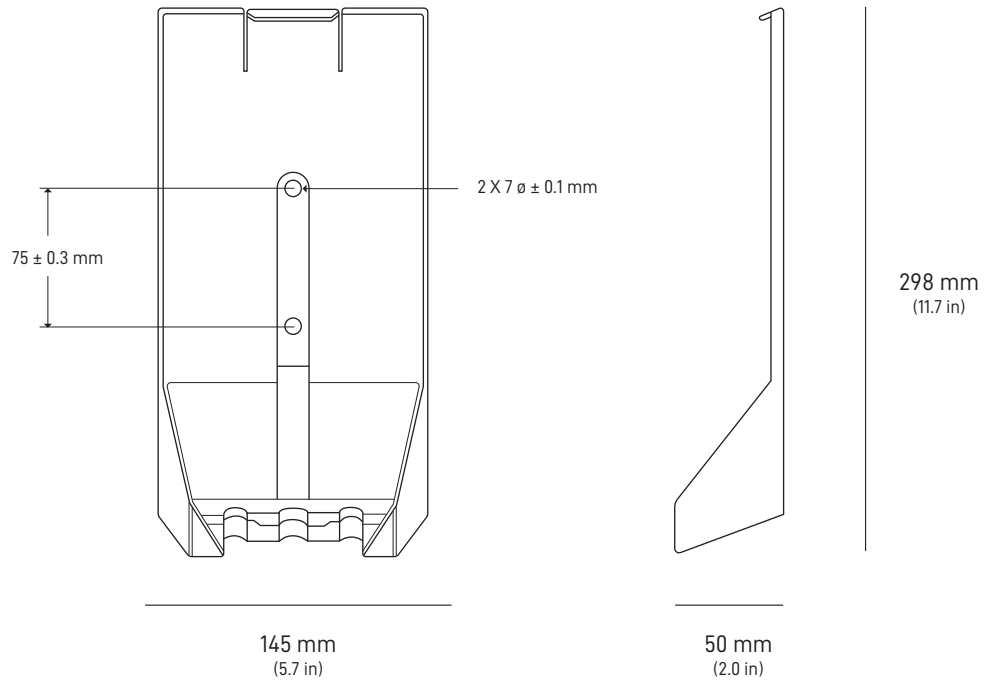





WEDGE MOUNT

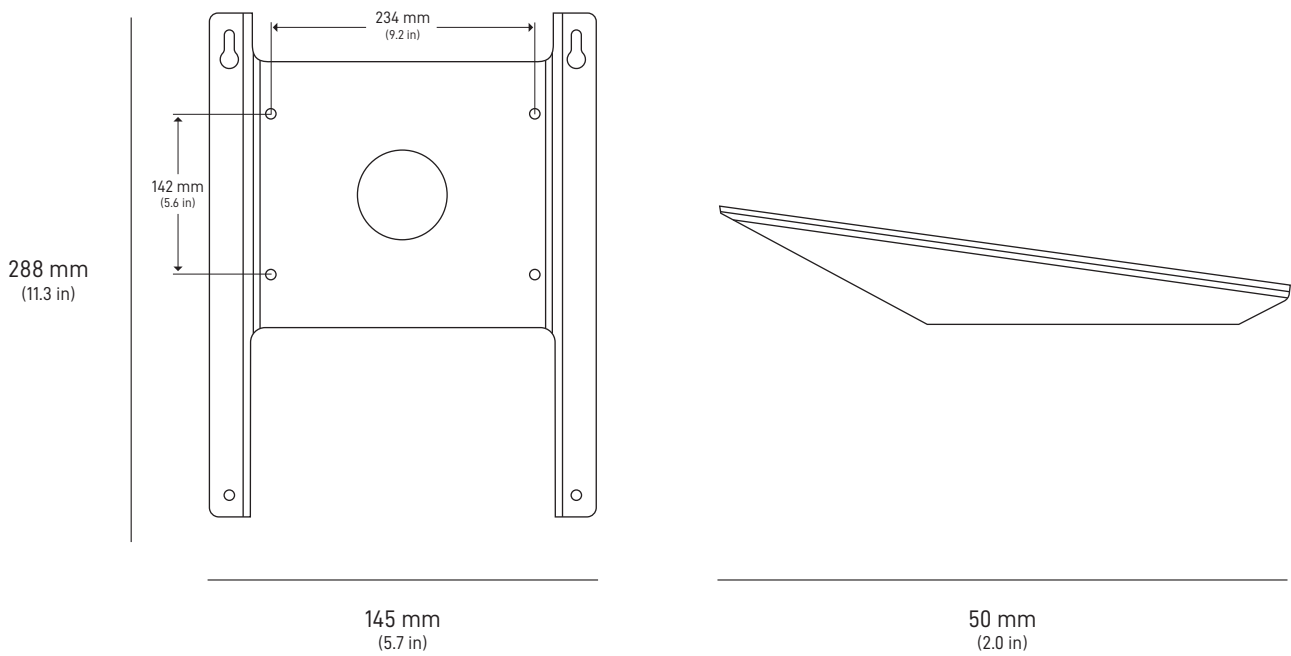

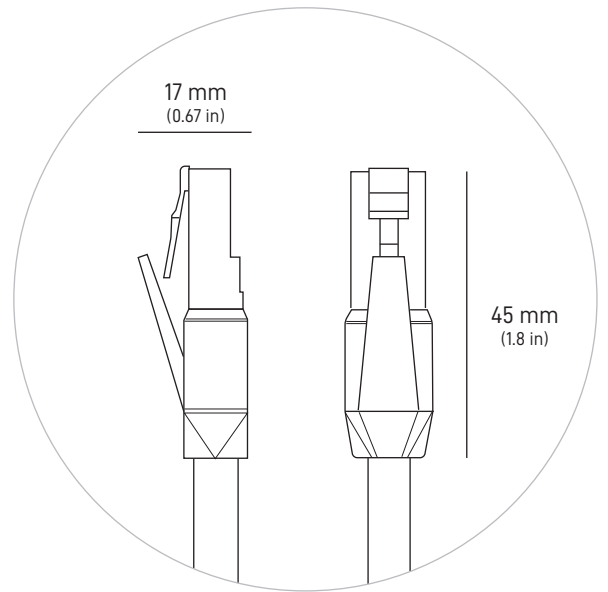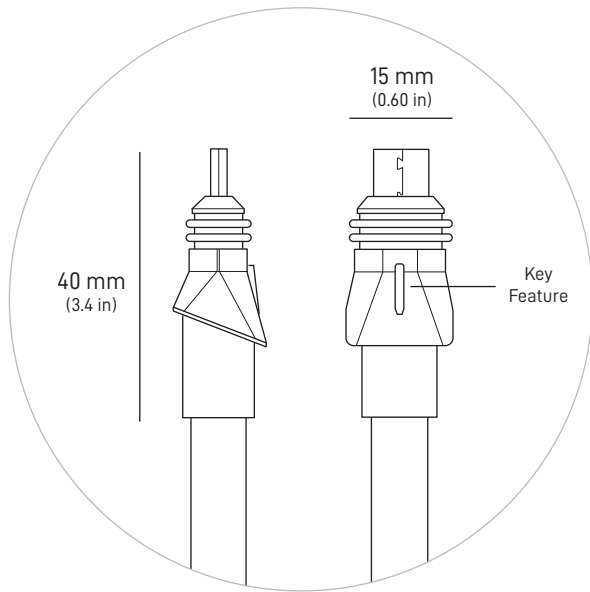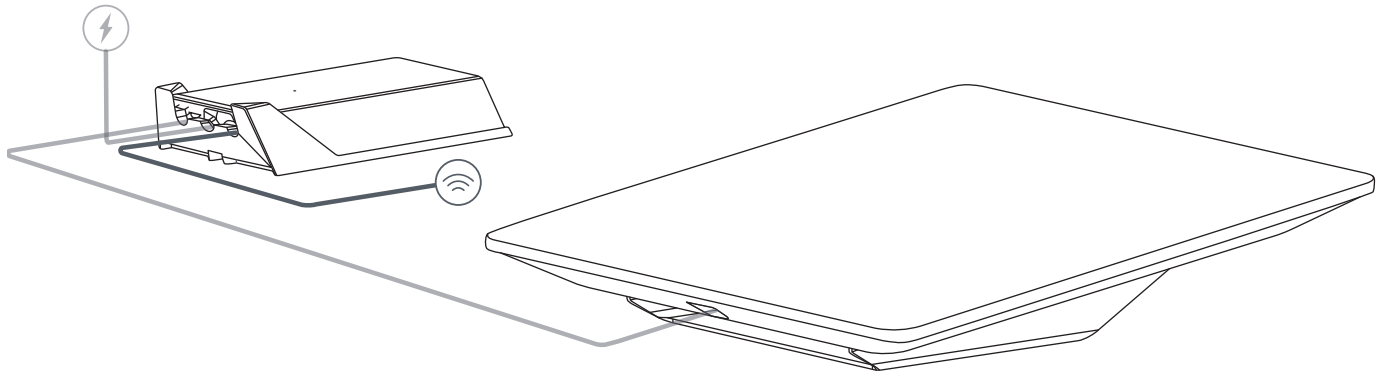

End	Pin	Ethernet Pin	Wire Color	Pin	End
RJ45	A1, A2	B+	Orange White	A1, A2	Power Supply
	A3, A4	B-	Orange	A3, A4	
	A5, A6	A+	Green White	A5, A6	
	A7, A8	A-	Green	A7, A8	
	B1, B2	--	N / C	B1, B2	
	B3, B4	--	N / C	B3, B4	
	B5	D+	Brown White	B5	
	B6	D-	Brown	B6	
	B7	C-	Blue White	B7	
	B8	C+	Blue	B8	
	B9, B10	--	N / C	B9, B10	
	B11, B12	--	N / C	B11, B12	
	Shield Can		Drain Wire	Shell	

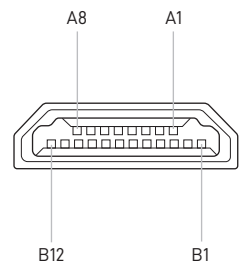

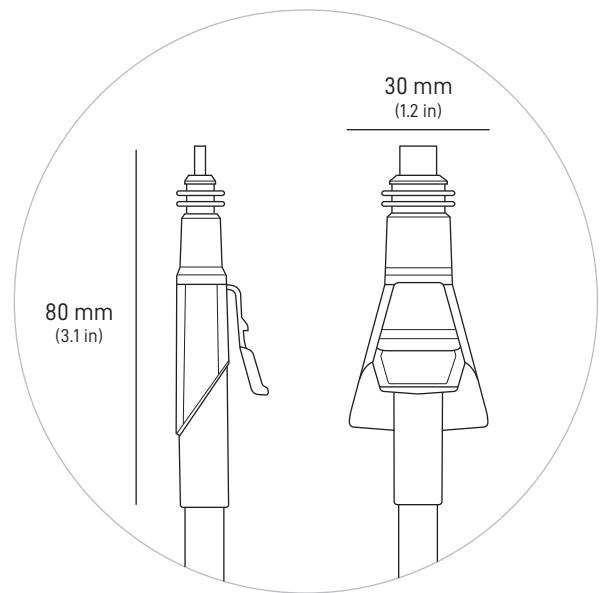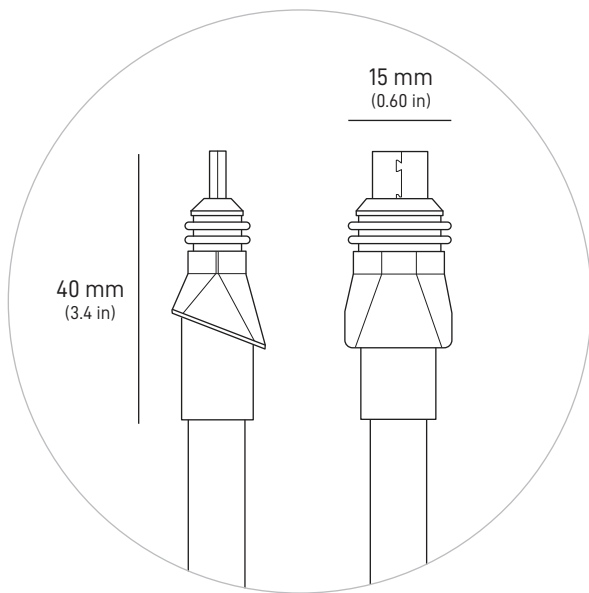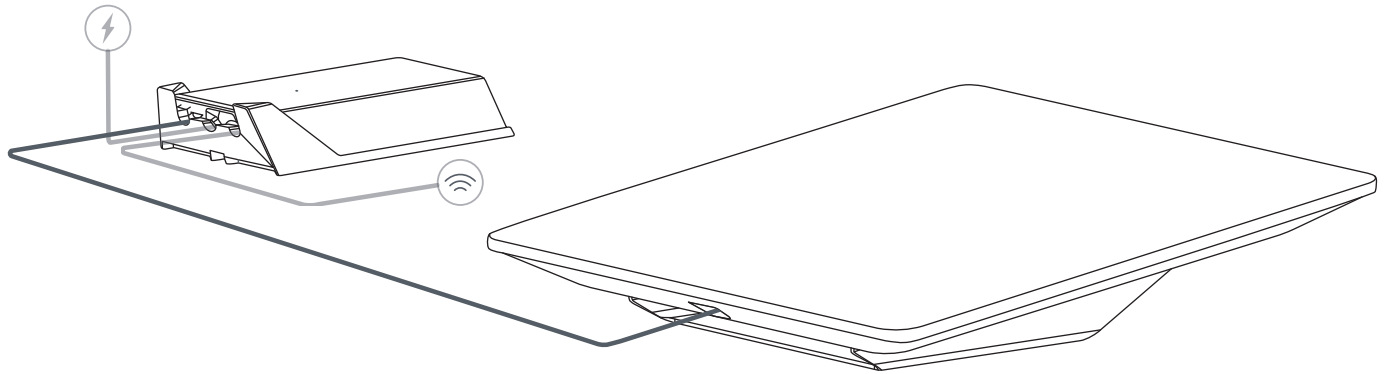

End	Pin	Wire Color	Pin	End
Dish	A1	Green	A1	Power Supply
	A2	Yellow	A2	
	A3	Blue	A3	
	A4	White	A4	
	B1	Orange	B1	
	B2	Purple	B2	
	B3	Brown	B3	
	B4	Gray	B4	
	B5	Shield / Shell	B5	

